

**COMPACT 2-3**  
**ROTARY SCREW COMPRESSORS**  
COMPACT SERIES

DIRECT COUPLING 1:1

**PROFESSIONAL**  
Series

air technology systems



# COMPACT 2



Grounded with  
2,5 liters tank



On tank (90 Lt )



Air trolley



- Greatest energy efficiency
- Designed as a big compressor
- Cooling circuit
- Best performance in just a small amount of space
- Great compactness













## INTEGRATED AIR-END

**COMPACT** is made up of a state-of-the-art pumping group, the most compact in the field, integrating the main components of a screw compressor (air-end, separator tank, thermostatic and minimum pressure valve, intake valve).



## Compact 2 series


### TECHNICAL SPECIFICATIONS OF COMPACT 2 SERIES

Code	Model	Power	Tank	Pressure	Air Flow*	Noise L.**	Voltage	Connection	Dimensions	Weight
EAN										
		kW	Lt	bar	ℓ/min	dB[A]	Volt/Ph/Hz	BSP	L x W x H (cm)	Kg
COMPACK 2 SPECIAL - grounded										
180012039	COMPACK 2 SPECIAL	2,7	2,5	10	270	65	230/1/50	QUICK CONNECTOR	67x40x47	46
180012041		3			290		400/3/50			
COMPACK 2 SPECIAL - on tank										
180012042	COMPACK 2 SPECIAL / 90	2,7	90	10	270	65	230/1/50	G 1/2"	116x44x88	78
180012040		3			290		400/3/50			
COMPACK 2 SPECIAL - trolley										
180012043	COMPACK 2 SPECIAL AR	2,7	2,5	10	270	65	230/1/50	QUICK CONNECTOR	67x55x61	52
180012044		3			290		400/3/50			

\* Performances measured according to ISO 1217, annex C.

\*\* Noise level measured according to ISO 2151.



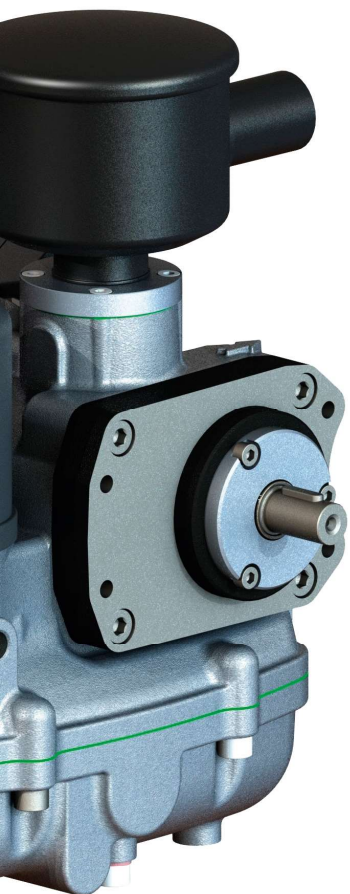

- Electronic controller and load/unload system
- Super silenced
- Turnkey products with an aluminum case
- Fast and economical maintenance
- Anti-condensation system
- Constant and immediate air flow with no big tanks required

## COMPACT 3



Grounded



On tank (90 Lt)

## COMPACT SERIES

**COMPACT** stands for an authentic revolution in the field, adopting the technical and technological solutions of an industrial screw compressor on the professional market which, until some time ago, was mainly using piston compressors. Thanks to the Heating System that eliminates the condensate problem, **COMPACT** can also run discontinuously. Moreover, it guarantees more airflow and energy efficiency if compared to a piston compressor with the same motor power.



Air trolley

### Compact 3 series

#### TECHNICAL SPECIFICATIONS OF COMPACT 3 SERIES

Code EAN	Model	Power kW	Tank Lt	Pressure bar	Air Flow* ℓ/min	Noise L.** dB[A]	Voltage Volt/Ph/Hz	Connection BSP	Dimensions L x W x H (cm)	Weight Kg
<b>COMPACT 3 - grounded</b>										
180022001	COMPACT 3	3,5	-	10	360	69	400/3/50	G 3/8"	55x43x42	45
<b>COMPACT 3 - on tank</b>										
180022020	COMPACT 3/90	3,5	90	10	360	69	400/3/50	G 1/2"	116x44x88	77
<b>COMPACT 3 - trolley</b>										
151022004	COMPACT 3 AR	3,5	7	10	360	69	400/3/50	G 3/8"	76x62x70	71

\* Performances measured according to ISO 1217, annex C.

\*\* Noise level measured according to ISO 2151.



**KTC S.r.l**

Via Palazzon, 70  
36051 Creazzo (Vicenza) Italy  
T +39 0444-551759  
F +39 0444-1510104

**[www.ktc-air.com](http://www.ktc-air.com)**  
**[info@ktc-air.com](mailto:info@ktc-air.com)**

**Tutti i diritti riservati.**

Visto il continuo miglioramento dei nostri prodotti ci riserviamo il diritto di modificare le caratteristiche degli stessi senza alcun preavviso.  
Le immagini presenti nei cataloghi non sono contrattualmente vincolanti.

**All rights reserved.**

According to the continuous improvement of our products we reserve the right to modify their characteristics without notice.  
All pictures in the present catalogue are not contractually binding.